




2/8/2018 C:\Projects\4718\4718_15\Dead\STEPHAN PONDOS











SCHEDULE										LIMIT TYPES	
		DOOR			FRAME						
ITEM	QTY	SIZE	TYPE	DOOR NUMBER	SLIDE	LATCHED	SEE (SEE PAGE)	TYPE	LIMIT TYPE	LIMIT TYPE	
1	1	2'-0" x 7'-0"	REINFC	01			30	0101	0101		
2	1	2'-0" x 7'-0"	REINFC	02			30	0101	0101		
3	1	2'-0" x 7'-0"	PATLS	03			30	0101	0101		
4	1	2'-0" x 7'-0"	004	01			30	0101	0101		
5	1	2'-0" x 7'-0"	REINFC	04			30	0101	0101		
6	1	2'-0" x 7'-0"	REINFC	05			30	0101	0101		
7	1	2'-0" x 7'-0"	REINFC	06			30	0101	0101		
8	1	2'-0" x 7'-0"	REINFC	07			30	0101	0101		
9	1	2'-0" x 7'-0"	REINFC	08			30	0101	0101		
10	1	2'-0" x 7'-0"	REINFC	09			30	0101	0101		
11	1	2'-0" x 7'-0"	REINFC	10			30	0101	0101		
12	1	2'-0" x 7'-0"	REINFC	11			30	0101	0101		
13	1	2'-0" x 7'-0"	REINFC	12			30	0101	0101		
14	1	2'-0" x 7'-0"	REINFC	13			30	0101	0101		
15	1	2'-0" x 7'-0"	REINFC	14			30	0101	0101		
16	1	2'-0" x 7'-0"	REINFC	15			30	0101	0101		
17	1	2'-0" x 7'-0"	REINFC	16			30	0101	0101		
18	1	2'-0" x 7'-0"	REINFC	17			30	0101	0101		
19	1	2'-0" x 7'-0"	REINFC	18			30	0101	0101		
20	1	2'-0" x 7'-0"	REINFC	19			30	0101	0101		
21	1	2'-0" x 7'-0"	REINFC	20			30	0101	0101		
22	1	2'-0" x 7'-0"	REINFC	21			30	0101	0101		
23	1	2'-0" x 7'-0"	REINFC	22			30	0101	0101		
24	1	2'-0" x 7'-0"	REINFC	23			30	0101	0101		
25	1	2'-0" x 7'-0"	REINFC	24			30	0101	0101		
26	1	2'-0" x 7'-0"	REINFC	25			30	0101	0101		
27	1	2'-0" x 7'-0"	REINFC	26			30	0101	0101		
28	1	2'-0" x 7'-0"	REINFC	27			30	0101	0101		
29	1	2'-0" x 7'-0"	REINFC	28			30	0101	0101		
30	1	2'-0" x 7'-0"	REINFC	29			30	0101	0101		
31	1	2'-0" x 7'-0"	REINFC	30			30	0101	0101		
32	1	2'-0" x 7'-0"	REINFC	31			30	0101	0101		
33	1	2'-0" x 7'-0"	REINFC	32			30	0101	0101		
34	1	2'-0" x 7'-0"	REINFC	33			30	0101	0101		
35	1	2'-0" x 7'-0"	REINFC	34			30	0101	0101		
36	1	2'-0" x 7'-0"	REINFC	35			30	0101	0101		
37	1	2'-0" x 7'-0"	REINFC	36			30	0101	0101		
38	1	2'-0" x 7'-0"	REINFC	37			30	0101	0101		
39	1	2'-0" x 7'-0"	REINFC	38			30	0101	0101		
40	1	2'-0" x 7'-0"	REINFC	39			30	0101	0101		

WINDOW SCHEDULE										
WINDOW		WINDO		WINDO		WINDO		WINDO		WINDO
LOCATION (ROOM)	SIZE (WINDO OPEN)	TYPE	MANUFACTURER	CATALOG NO.	NO. FT. WIDE	NO. FT. HIGH	NO. FT. WIDE	NO. FT. HIGH	NO. FT. WIDE	NO. FT. HIGH
REAR PORCH	2'-0" x 4'-0"	SH-	ALUMINUM	2000	1.00	8.00	6.00			
LOFT	8'-0" x 4'-0"	SH-	ALUMINUM	S-2000	4.00	8.00	24			
REAR PORCH	2'-0" x 4'-0"	SH-	ALUMINUM	2000	1.00	8.00	6.00			

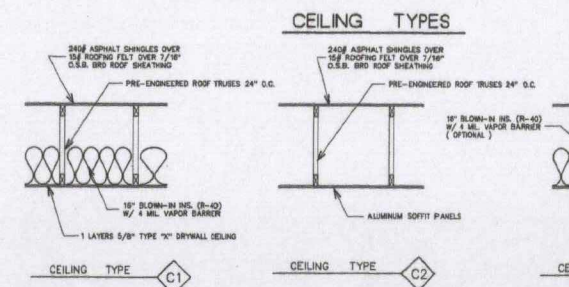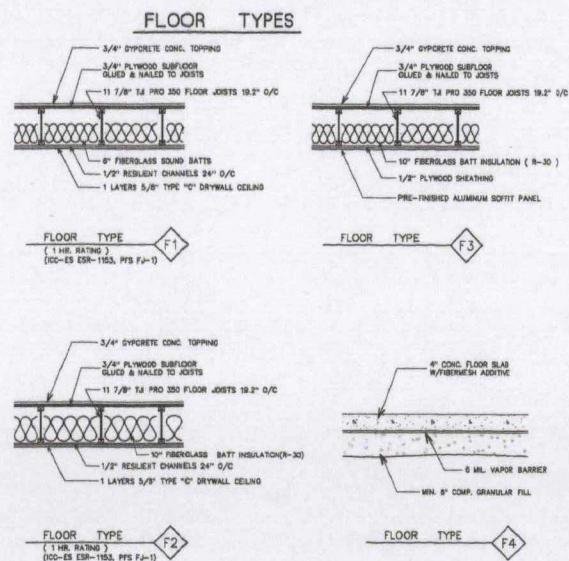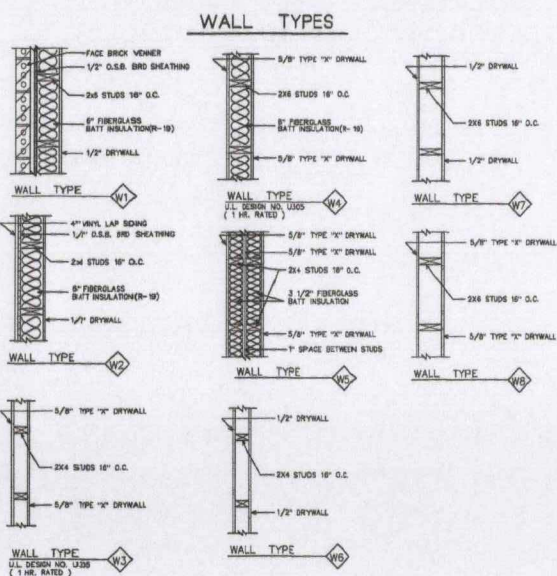


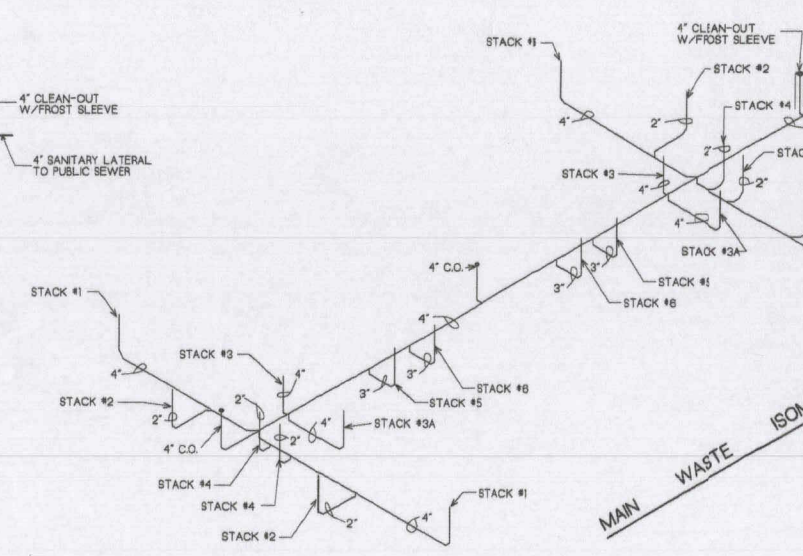


Diagram illustrating the components of a riser detail, labeled as follows:

- 1 BALL VALVE
- 1" JOINT
- 1" BALL VALVE
- DOWNWARD TO OUTSIDE
- RESTRICTED DRIVE RIGHT CURB
- PRESSURE GAUGE
- FLUX BRIDGE
- 7" ASBESTOS CEMENT RIBBON JOINT WITH THUNDER BOLT
- BASE OF RISER
- 1 UNDERGROUND TO OUTSIDE
- PRESSURE GAUGE
- TO EXHAUST WATER

RISER DETAIL
NO SCALE

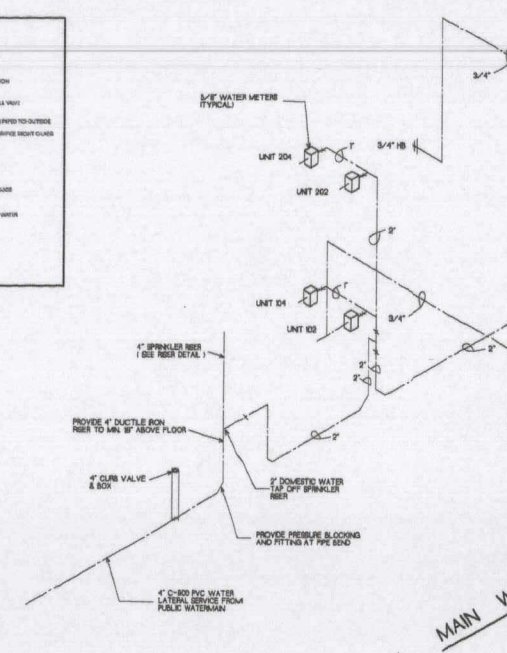

FIXTURE SCHEDULE

MAKE & MODEL

SLUR DRY-0000 w/BENEKE M-150 Waste
Sink, Supply & Stop

Central Mangle Capstan Type w/ENCL
400' Floor, Fan-Up, Dish. Supplies
& Stop

Aspir Model B005 Flanges Top
-Shower Unit w/ENCL 500' Top/Shower
Valve & Cleanout No. 266 Dish

2-American Standard #7025.027
Floor Vent 1/2" x 1/2" x 1/2" Cast
Fused 14000.03 & -1000-019
Floor Vent 1/2" x 1/2" x 1/2" Cast
Supplies & Stop

By Others - Furnish Air-Gas Dish.
Fittings, Supplies & Stop

By Others - Furnish Supplies &
Stop

40 Gal Electric Water Heater w/pressure
& temperature relief valve

HILLBROOK water conditioning Model
H-1200 NMC. Capacity met. Sell
price \$250.00 gpm/1/2" x 3/4" flow
rated 64 gpm/27 psi

Wastoid Model 25

- ## 10. WATER PIPING:
- Materials**
- Pipe shall be Type K copper underdrain and Type M above ground. Fittings shall be wrought copper joints with 1/2" flaring pipe and 1/2" fittings, applying flux, proper amount of heat and solder.
- 11. VALVES:**
- General:**
- Provide valves at header, hose bibs, and as required by Code.
- Provide independent valves at each fixture, provide access points at all concealed valves. All valves shall be minimum 1/2" working pressure. All valves shall be Ball Type.
- 12. CLEANING OF PIPING SYSTEMS AND EQUIPMENT:**
- At completion of the work, remove protective material from all equipment, at point and plaster splatterings, and remove piping pattern under this section of work; all items shall be left clean and ready for use.
- 13. PIPE INSULATION:**
- Insulate cold and hot water lines with fibrous glass, minimum 3/4" thick, with FR vapor proof jacket. Insulate fittings and joints to provide vapor proof installation. Use hot caustic, sewing stops, etc.

PICTURE		MAKE & MODEL
P-1 Water Closet		BELIER D-9000 WABENKE M-180 White Faucet: Brass
P-2 Lavatory		Waterloo Ceramic Center Type 9000 4021 Faucet: Porcelain Drop Basin
P-3 Bath Tub		Aire Model R0800 Sargentes Tub "Rever" Unit 4020S 599R Tub/Shower Valve: Brass To 3/28 Dia.
P-4 Kitchen Sink		"American Standard T702052" Single Bowl 36" x 18" x 11" Steel Cast Faucet 440031-31 1/2" orifice-Drop Sink 33" Drain Offset Dish. Faucets & Stops
P-5 Dishwasher		By Others - Fumell Air-Glad Dish, Filtering, Soapless & Stop
P-6 Clothes Washer		By Others - Furman Supplies & Stop
P-7 Water Heater		40 Gal Electric Water Heater w/pressure temperature relief valve.
P-8 Water Softener		DEL-UMBRAC water conditioners model W-4000 Softens 100 GPM Flow 52200 GPM/7.5 lbs. Flow Rating 4 gpm/27 sec
Hose Bikes		Woodford Model 25